

simple, efficient, and cost effective floor and surface drainage system







Flush Nozzle







Features & Benefits

- Factory constructed, bolt-together
 9'10" (3 metre) sections.
- Maintenance free, no grates to clean or remove.
- Open slot concept which blends in neatly with surface materials.
- U-drain can be used as a centre screed, utilizing a two slope concrete pour.
- E-Z Mount Rebar Brackets are designed to reduce labour costs versus poured in place drain.


- Built using 16 gauge galvanized steel, also available in stainless steel.
- Custom drainage solutions are available upon request.
- Each section is pre-sloped 1/2" per 3 metre section.
- Galvanized cleaning paddle is also available, upon request.









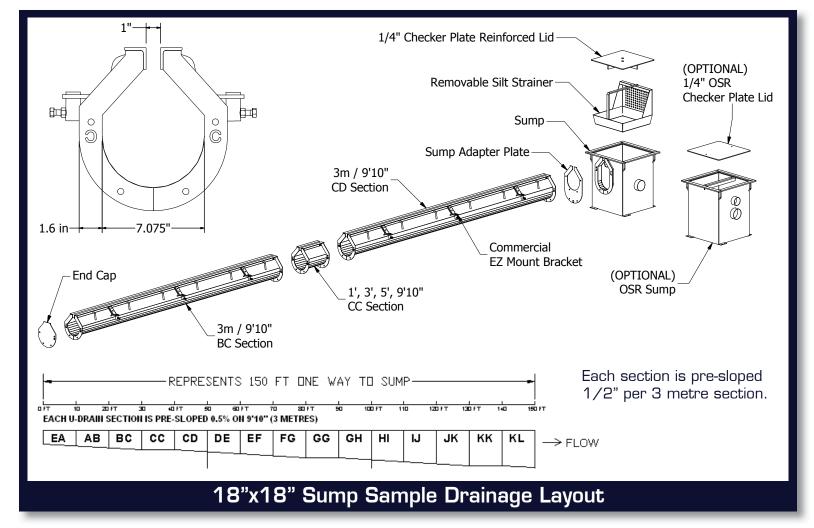

Custom layouts are available upon request

Custom sump pit sizing available. Oil seperator pits available.


- Available with single and dual inlet flanges
- 1/4" reinforced checkerplate lid
- Mounting tabs to secure prior to placement of concrete
- Standard 4 1/2" discharge outlet, adaptable to smaller sizes
- Silt strainer basket included with all 18" x 18" Sump Pits
- Rebar weldments for structural integrity and easy installation

 Standard 18", 24" and 36" Checkerplate and Grated lids are designed to support 8,000 lbs (exceeds HS-20 load rating)



18" x 18" x 24" Sump 24" x 24" x 24" Sump

lid sold seperately comes with lid

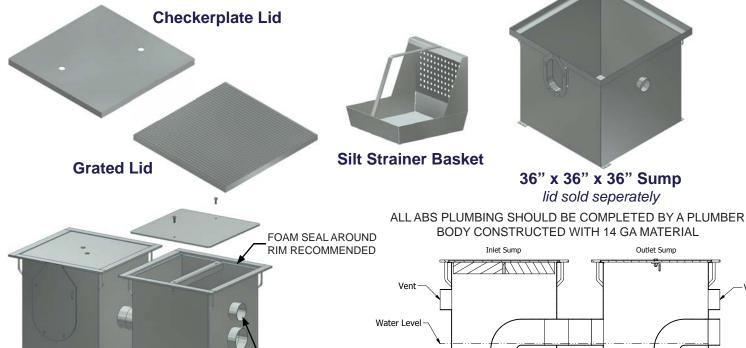

3" SCH 40 STUB ON EACH PIT FOR VENT TO **OUTER ATMOSPHERE**

Sump Pits





Distributed By:

PO Box 119 RR1, Morris, Manitoba ROG 1KO **Toll Free**: (855) 746-8200 Phone: (204) 746-8200 e-mail: info@norstarindustries.ca **Fax**: (204) 746-8074

www.u-drain.ca

Approved By:

CAD and Specs available at





VENT















